

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/014427 A1

(51) International Patent Classification⁷: **B65D 81/32**

(21) International Application Number:
PCT/GB2004/002586

(22) International Filing Date: 17 June 2004 (17.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0317720.1 29 July 2003 (29.07.2003) GB

(71) Applicant (for all designated States except US):
RECKITT BENCKISER (UK) LIMITED [GB/GB];
103-105 Bath Road, Slough, Berkshire SL1 3UH (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RYMER, Shaun,
Patrick** [GB/GB]; Reckitt Benckiser Corporate Services
Limited, Dansom Lane, Hull HU8 7DS (GB). **VAN**

DIEPEN, Jacobus, Simon, Petrus [NL/DE]; Reckitt
Benckiser Produktions GmbH, Dr. Albert Reimann Str. 3,
D-68526 Ladenburg (DE).


(74) Agents: **BOWERS, Craig, M.** et al.; Reckitt Benckiser
plc, Group Patents Department, Dansom Lane, Hull HU8
7DS (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: BOTTLE FOR DISPENSING TWO LIQUIDS

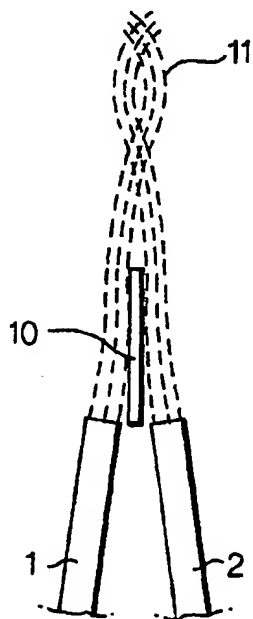

(57) Abstract: A bottle (13) for dispensing two liquids, the
bottle (13) comprising two reservoirs, one for each liquid, a
nozzle (12) through which the liquids are dispensed from the
bottle (13), a passageway (1, 2) from each reservoir leading
out of the nozzle, and a deflector plate (10) between the two
passageways (1, 2) and projecting from the end of a nozzle
(12) in a direction substantially parallel to the direction of
flow from the nozzles (12) thereby causing the liquid leaving
one passageway to be deflected towards the liquid leaving the
other passageway so that the two liquids first mix once they
have passed the deflector plate (10).



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.